



# LED DOWNLIGHT

 Product&Family Code: **016 007 0003**
**VICTORIA-3**


## Technical Drawing

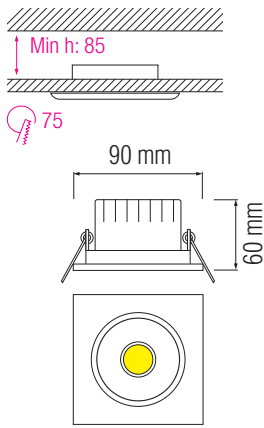

## Photometric Diagram

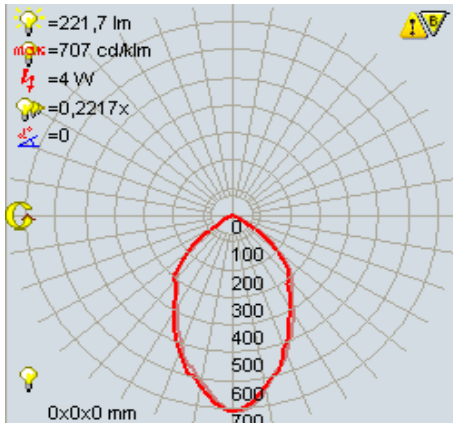

| Technical Data                                   |                            |
|--|----------------------------|
| Voltage (V)                                      | 220-240V                   |
| Product Wattage (W)                              | 3                          |
| Equivalence with incandescent lamp               | 24                         |
| Colour Render Index (Ra)                         | >Ra80                      |
| Colour Temperature (K)                           | 2700K / 4200K / 6500K      |
| Materials  | Aluminium Die Casting Body |
| Protection Class                                 | II                         |
| Dimmable   | No                         |
| EEI  | A to A++                   |
| Warm-up time up to 60 % of the full light output | Instant Full Light         |
| Luminous Flux (lm)                               | 208 - 230                  |
| Luminous Efficacy (lm/W)                         | 69 - 76                    |
| Rated Life (hrs) Ⓢ                               | 40.000                     |
| IP Rating  | 20                         |
| Power Factor                                     | >0.5                       |
| Beam Angle                                       | 87°                        |
| Starting Time                                    | <0.2s                      |
| Number of ON-OFF cycling                         | x25.000                    |

## Applications

Airport, Bathroom, Bedroom, Car Park, Cinema, Gallery, Hospital, Hotel, Kitchen, Museum etc.



## Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- Innovative design of assembly structure.
- Extremely Long Life.

